## **EUROPEAN PATENT OFFICE**

## Patent Abstracts of Japan

**PUBLICATION NUMBER** 

02159469

**PUBLICATION DATE** 

19-06-90

APPLICATION DATE

14-12-88

APPLICATION NUMBER

63315342

APPLICANT: HONDA MOTOR COLTD;

INVENTOR: KATAGIRI YOSHIHIRO;


INT.CL.

F16H 61/40

TITLE

HYDRAULIC CONTINUOUSLY

VARIABLE TRANSMISSION

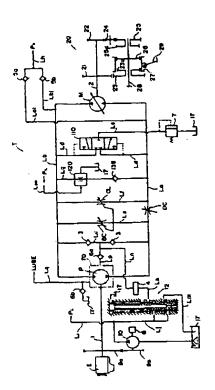

ABSTRACT: PURPOSE: To prevent engine stall at the time of sudden engine braking by controlling the bypass oil passage opening of a hydraulic pump with a bypass clutch valve interlocked with a main clutch valve in interrupting a hydraulic close circuit via a directly coupled clutch valve.

> CONSTITUTION: When a brake is operated in the condition where a hydraulic pump P and a hydraulic motor M are rotating monolithically with a directly coupled clutch valve DC turned ON at a minimum gear ratio and a hydraulic circuit closed, a bypass clutch BC also opens interlocked with the opening of a main clutch valve DL. As a result, even if the directly coupled clutch valve DC is turned ON, therefore, an oil flow through a bypass oil passage Ls is allowed. Even when the rotation of the hydraulic motor M is interrupted, therefore, the delivery oil of the hydraulic pump P flows to an intake side through the bypass oil passage Ls and the hydraulic pump P keeps a running condition. According to the aforesaid construction, even when the brake is suddenly operated, it is possible to prevent the stall of an engine E connected to the hydraulic pump P.

COPYRIGHT: (C)1990,JPO&Japio